

PAPER NAME

9. Artikel - Performance test of biomass stove with modification of sleeve.pdf

AUTHOR

S. Suluh

WORD COUNT

2242 Words

CHARACTER COUNT

11918 Characters

PAGE COUNT

4 Pages

FILE SIZE

188.2KB

SUBMISSION DATE

Apr 25, 2023 8:38 PM GMT+8

REPORT DATE

Apr 25, 2023 8:39 PM GMT+8

● 8% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 8% Internet database
- 3% Publications database
- Crossref database
- Crossref Posted Content database
- 5% Submitted Works database

● Excluded from Similarity Report

- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 12 words)
- Manually excluded sources



PERFORMANCE TEST OF BIOMASS STOVE WITH MODIFICATION OF SLEEVE DIAMETER VARIATION

Sallolo Suluh¹, Yusri A. M. Ambabunga², Ferayanti Boas Gallaran³, Yulianus Rombe Allo, Berlian Dewi Zetikarya and Rianto Lapu¹

¹Department of Mechanical Engineering, Faculty of Engineering, Indonesia Christian University Toraja, Tana Toraja, Indonesia

²Department of Indonesian Language Education, Faculty of Teacher Training and Education, Indonesia Christian University Toraja, Tana Toraja, Indonesia

³Department of English Language Education, Faculty of Teacher Training and Education, Indonesia Christian University Toraja, Tana Toraja, Indonesia

E-Mail: sallolone@gmail.com

ABSTRACT

Usage of biomass briquettes as an elective fuel can supplant fuel oil, particularly lamp oil and gas which has been less compelling in its excursion because of a few factors that impact it. hence, further develop the oven that capacities to move heat from the biomass briquettes so the cooking quality is more compelling. So, this examination plans to use coconut shell squander briquettes as fuel in an oven whose ignition chamber is changed by differing the distance across of the aluminum chamber. the outcomes showed that the 170mm chamber measurement variety was the most unrivalled as far as consuming time, briquette mass, and warm productivity of 99 minutes, 0.76 kg, and 39.56%, individually.

Keywords: coconut shell charcoal briquettes, calorific value, physical property, and stove efficiency.

INTRODUCTION

Energy needs are growing along with population growth and innovative advances. Meanwhile, the size of the accessible energy supply is limited due to consistent use. This is due to the scarcity of energy and the reduction in world oil costs due to its inexhaustible nature. This must be immediately balanced with the arrangement of elective fuel sources that are inexhaustible, abundant, and reasonable for the wider local area. One of the abundant sources of elective fuel comes from the biomass energy season. Biomass is a natural waste material obtained from green plants. Biomass comes from horticulture, plantations. One of the wastes used comes from the livestock area, especially coconut shell waste. Coconut shell charcoal through the carbonization cycle is not difficult to minimize and form and has a high calorific value. The durability of coconut shell was used in research because there were several previous studies, in particular [1] looking at coconut shell charcoal with various types of sand added ingredients which produced a calorific value of 5893.33 calories/gram. And 64.15% warm productivity. [2] investigation of coconut shell briquettes for fuel found the calorific value of 4949 calories/gram. [3] led the combination of coconut husk and coconut shell with a proportion of 20%: 60% resulting in a calorific value and warm productivity of 5675 cal/gram and 43.82%, individually. [4] the investigation was directed at the combination of rice husks and coconut shells with a proportion of 50:50 resulting in a calorific value of 4966 kcal/kg. Finally, [5] directed examination of rice husks and coconut shells with powdered paper glue resulting in a calorific value of 4214.86 kcal/kg. Under certain conditions experienced, the problem that often arises is not the use of briquette fuel, but more explicitly the biomass briquette oven as a less than ideal heat conductor. Recall that there are several checks before changing the oven

ignition chamber, in particular [6] directing exploration on a biomass oven with a 180mm expansion chamber gave warm productivity of 52.87%, [7] adjusting the oven to create warmth effectiveness of 68%, [8] with an aluminum chamber with a single opening line at the top, resulting in 71.03% warm prowess. [9] change of 3 heaters with aluminum chamber expansion and up, down mesh resulted in 65.06% warm productivity, and [10] heating adjustment with insulin chamber expansion resulted in 57.4% warm effectiveness.

Therefore, in this test, the modification of the oven combustion chamber is equipped with additional variations in the measurement of the aluminum chamber using coconut shells. Considering no similar test using ovens and shields manufactured using similar aluminum.

LITERATURE REVIEW

A briquette oven is a cooking tool that utilizes briquette fuel, which is a strong material that has been appropriately handled with or without carbonization from coal or comparable biomass. Right now, its utilization is natural, due to the proposal from the public authority to check energy, it has been utilized as an elective cooking tool that utilizes fuel without oil or gas. Sorts of briquette oven plans available differ extraordinarily, both fit and size. Briquette ovens are by and large made of steel, earth or aluminum. [12]

Aluminum metal is a metal that has lightweight properties that have a wide use. Other than being light, it additionally enjoys different benefits, for example, great warmth move. Aluminum was first found by Sir Humphrey Davy in 1809 as a component, and was first decreased by HC Oersted in 1825. Aluminum has a few actual attributes, including having a particular gravity of about 2.65-2.8 kg/dm³, having great electrical and warm conductivity, protection from consumption, in certain



materials, a liquefying point of 6580°C and a face focused nuclear plan.

Coconut shell is one of the dynamic carbon materials which has great quality as initiated charcoal. Physiologically, the shell is the hardest part contrasted with other coconut parts. The hard design is brought about by silicate (SiO₂) which is very high in the coconut shell. 10 coming up next is a synthetic synthesis that is generally found in coconut shells. Coconut shell briquettes have a calorific worth of 5655 cal/g, better than bagasse just as coal and straw. [11]

MATERIAL AND METHODS

The biomass stove used is made of aluminum with estimations of height 300mm, outside distance across 220mm, and internal broadness 210mm.

The sort of biomass used in this examination is coconut shell waste, with the kind of briquettes used as wisp homes. The composition of the mixture of coconut shell charcoal briquettes can be seen in table 1 below:

Table-1.

Sample	Mixture Composition			Water (ml)
	Coconut Shell (gram)	Clay (Gram)	Tapioca Flour (gram)	
briquettes	850	75	75	800

Table-1 above shows that the composition of the mixture used as fuel is a mixture of 800 grams of coconut shell charcoal and the binding agent is 75 grams of clay and 75 grams of tapioca flour with a hot water content of 800 ml.

The assessment system used is a preliminary procedure by utilizing coconut shell briquettes as fuel in an aluminum broiler with the change of adding assortments somewhere far off across of the chamber material as much as 5 pieces with estimations of 180 mm, 170 mm, 160 mm, 150 mm, and 140 mm.

RESULTS AND DISCUSSIONS

The examination was done as follows: making briquettes, drying briquettes, testing approximations and calorific qualities, and testing burning on an oven with adjusted chamber width varieties.

Table-2. Recapitulation of calculation results.

Symbol	Cylinder Diameter (mm)				
	180	170	160	150	140
T _f (°)	590	510	476	463	472
T _{cc} , (°)	396	356	358	360	352
T _{bb} (Minute)	90	99	90	84	61
m _{bt} (kg)	0.76	0.76	0.85	0.89	0.89
η _{th} (%)	38.23	39.56	24.12	22.20	12.10

In Table-2 above, it tends to be seen that the most noteworthy biomass oven as far as cooking effectiveness is in reality found in the 180mm width variety, however in the entire cycle of consuming and heating up the fire is seen more 39.96 %. Yet, in the entire cycle of consuming and bubbling fire, what is seen that is more predominant is the distance across of 170mm, for example, the length of the bubbling time, the mass of the briquettes consumed, and the warm proficiency. This can likewise be seen from a few realistic wonders that can guarantee that the measurement of 170mm is the awesome the other 4 varieties.

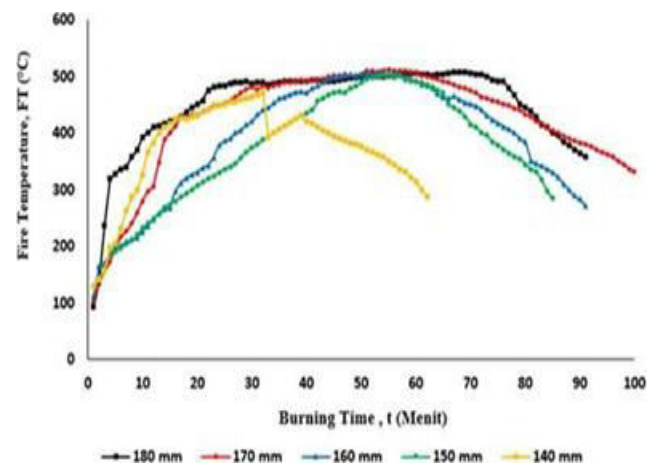


Figure-1. History fire temperature.

Figure-1. Above can be seen that the bigger the width of the sleeve, the higher the fire temperature up to 170mm. It very well may be seen that the most steady and durable fire temperature is at a variety of the 170mm sleeve breadth of 510°C. Then, at that point drops to approach encompassing temperature. Albeit the most noteworthy fire temperature is somewhat higher than 180mm in width.

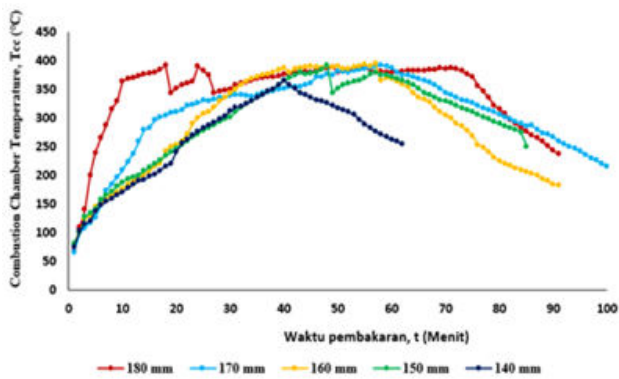


Figure-2. History combustion chamber temperature.

Figure-2. The more extensive the width of the sleeve, the higher the temperature of the ignition chamber. The most noteworthy temperature was created at 395°C in the seventeenth moment at a sleeve breadth of 170mm. It is seen that the expansion and reduction in temperature will in general be shaky, just at 20 to 65 minutes is to some degree stable. Then, at that point it's anything but some time and afterward goes down once more. It very well may be seen that the temperature increments and diminishes for every variety alongside the breadth.

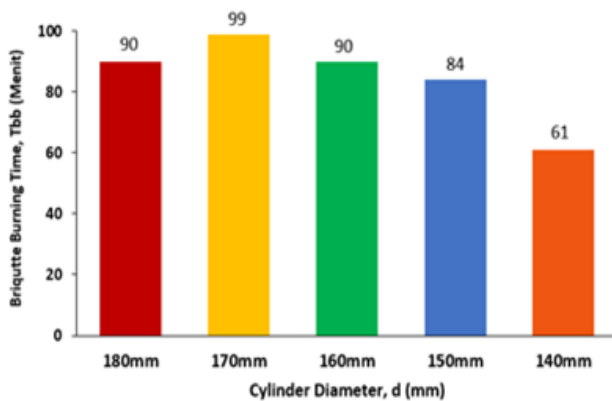


Figure-3. Briquettes burning time.

Figure-3. The bigger the breadth of the sleeve, the more drawn out the interaction of start of the briquette fire. It tends to be seen that the pattern in this graph is straightforwardly corresponding to the temperature of the fire that keeps going quite a while in the burning interaction. The most extreme time span on chamber measurement.

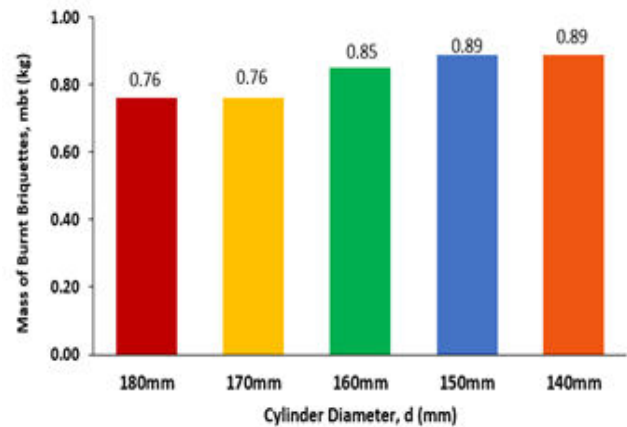


Figure 4. Mass of burnt briquettes chart.

Figure-4. The bigger the breadth of the sleeve, the more mass is utilized in the burning interaction in the ignition chamber. It tends to be seen that the 170mm sleeve breadth will in general devour 0.76 kg of briquette mass in the burning interaction. This occurs alongside the more drawn out the start interaction and the steady fire temperature during the burning cycle.

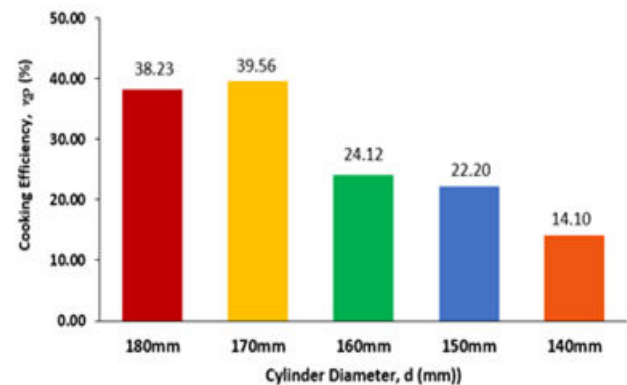


Figure 5. Cooking efficiency chart.

Figure-5. The more extensive the protection burning chamber breadth of the sleeve, the higher the cooking effectiveness delivered. The greatest cooking productivity is 40.67%. This is in accordance with the length of the start time, the steady temperature of the fire, and the mass of the briquettes that wore out in the bubbling and consuming interaction of the briquettes.

CONCLUSIONS

In light of the consequences of exploration and conversations that have been completed, it tends to be reasoned that the bigger the distance across of the sleeve alongside the higher the cooking execution of the biomass oven, which is gotten at the variety of the width of 170mm sleeve, is the most prevalent as far as length of ignition time, the mass of consumed briquettes and cooking effectiveness of each. Separately 99 minutes, 0.76 kg, and 39.56%.



REFERENCE

- [1] Suluh Sallolo Dan Martina Pineng. 2017. Analisis Tempurung Kelapa Sebagai Sumber Energi Alternatif. 2017: 217–222.
- [2] Arif Effendy and Suluh Sallolo. 2014. Study The 1st International Symposium on Smart Material and Mechatronics. Graduate School of Mechanical Engineering University of Hasanuddin. (72): 23-24.
- [3] 2020 Suluh Sallolo and Silka. 2020. Analisis Pemanfaatan Briket Arang Campuran Sabut Kelapa Dengan Tempurung Kelapa Sebagai Bahan Bakar Alternatif. *J. neutrino Pendidik. Fis. UKI Toraja*, 3(1): 1-6, [Online]. Available: <http://journals.ukitoraja.ac.id/index.php/neo>.
- [4] S. S. and K. U. 1 Y Yuliah1, M Kartawidjaja2. 2017. Fabrication and characterization of rice husk and coconut shell charcoal-based bio-briquettes as alternative energy source Fabrication and characterization of rice husk and coconut shell charcoal based bio-briquettes as alternative energy source. [Online]. Available: <https://iopscience.iop.org/article/10.1088/1755-1315/65/1/012021>.
- [5] R. R. K. K. Vivek C P1, Rochak P V2, Pillai Sagar Suresh3. 2019. Comparison Study on Fuel Briquettes Made of Eco-Friendly Materials for Alternate Source of Energy. Comparison Study on Fuel Briquettes Made of Eco-Friendly Materials for Alternate. doi: 10.1088/1757-899X/577/1/012183.
- [6] Z. Djafar, N. Amaliyah, S. Suluh, M. Isra and W. H. Piarah. 2020. The Performance of Clay Furnace with Variation in the Diameters of the Briquette Burning Chamber. The Performance of Clay Furnace with Variation in the Diameters of the Briquette Burning Chamber. doi: 10.1088/1757-899X/875/1/012068.
- [7] J. Wang, H. H. Lou, F. Yang and F. Cheng. 2016. Development and performance evaluation of a clean-burning stove. *J. Clean. Prod.*, pp. 1-9, doi: 10.1016/j.jclepro.2016.01.068.
- [8] S. Suluh, R. Tanduk, C. Johan, and N. Sirande. 2021. Study Experimental Performance Improvement of Various Stoves with Adding One Aluminum Cylinder. *ARPJ J. Eng. Appl. Sci.* 19(5): 607-610.
- [9] S. Suluh and P. Sampelawang. 2019. Pengaruh Penambahan Silinder Dengan Up And Down Grate Pada Tungku Pembakaran Biomassa. Vol. 1.
- [10] P. Orhevba, B.A., Olatunji, O.I. and Obasa. 2018. Performance Evaluation of a Modified Briquette Stove. 3(2): 898-908.
- [11] Arif Effendy and Suluh Sallolo. 2004. Study of Performance Improvement of Various Stoves with Waste Biomass Briquettes Fuel. The 1st International Symposium on Smart Material and Mechatronics. Graduate School of Mechanical Engineering University of Hasanuddin. No. 72.
- [12] Kuncoro Heru dan Damanik Ladjiman. 2005. Coal Briquette Stove Without BBM And Save Cost (Original in Bahasa: Kompor Briket Batubara Tanpa BBM Dan Hemat Biaya). Published Penebar Swadaya, Jakarta 2005.

● 8% Overall Similarity

Top sources found in the following databases:

- 8% Internet database
- 3% Publications database
- Crossref database
- Crossref Posted Content database
- 5% Submitted Works database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	SUNY Brockport on 2023-02-20 Submitted works	5%
2	atlantis-press.com Internet	2%
3	docplayer.net Internet	<1%